

Pressure Gauges

Economical Dry Gauge



Y SERIES ABS CASE PRESSURE GAUGE

Y40ZA-Y50ZA-Y63ZA-Y80ZA-Y100ZA

Description:

Standard pressure gauges mainly used for simple pressure measurement of liquids, vapour and gases, which are not crystallising, concretionary and no danger of explosion and that will not attack copper alloy parts



Application

- Pneumatics
- Heating industry
- Air-conditioning
- Medical engineering

Specification

Nominal Size:

1.5"(40mm), 2.0"(50mm), 2.5"(63mm), 3.5"(88mm), 4.0"(100mm)

Accuracy: $\pm 1.6\%$, $\pm 2.5\%$

Pressure Range: -1...0bar to 0...400bar

Working Temperature: -20°C...60°C

Case: ABS

Connection: Brass

Thread: 1/8", 1/4", 3/8", 1/2", PT, NPT, BSP and individual

Bourdon tube: Phosphor bronze, C-type or Helical type

Movement: Brass or Steel

Dial: Aluminium, White, black lettering

Pointer: Aluminium, black

Window: Plastic

Options


Customize range, scale or logo; Coloured sector, connection thread, pressure needle etc

Tel: 0086-574-23688830
Fax: 0086-574-23688830
Email: info@st-meter.com
Web: <http://www.st-meter.com>

Cixi Sito machinery Co.LTD.
West Section Gongye Road, Xinpu Town,
Cixi City, Ningbo, Zhejiang Province, China

Pressure Gauges

Economical Dry Gauge

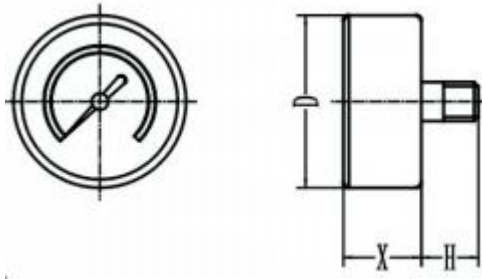

Back connection

Dimensions in mm				
Types	Nom.size	D	X	H
Y40ZA	40	41	24.5	15
Y50ZA	50	51	27.5	17
Y63ZA	63	63	28.5	17.5
Y80ZA	80	79	30.5	24

Tel:0086-574-23688830
Fax:0086-574-23688830
Email:info@st-meter.com
Web:http://www.st-meter.com

Cixi Sito machinery Co.LTD.
West Section Gongye Road,Xinpu Town,
Cixi City,Ningbo,Zhejiang Province,China